

Document 00910

ADDENDUM NO. Four

Date of Addendum: 2 SEPT 2005



PROJECT NAME: Jesse H. Jones Central Library Renovation-
Carnegie Regional Branch Library Renovation-
Library Resource Center Renovation-

PROJECT NO: E-0011-01-3

E-0142-01-3

E-0076-01-3

PROPOSAL SUBMITTAL DATE: September 15, 2005


FROM: City of Houston, Building Services Department

900 Bagby, 2nd Floor

Houston, Texas 77002

Attn: Jack Welker, Project Manager

TO: Prospective Proposers

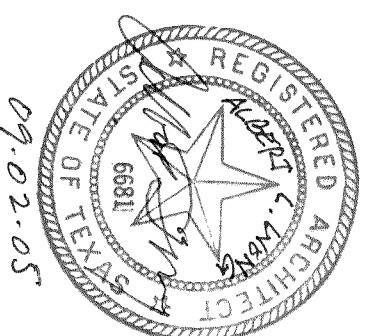

This Addendum forms a part of the Request For Competitive Sealed Proposals and will be incorporated into the Contract documents, as applicable. Insofar as the original Project Manual and Drawings are inconsistent, this Addendum governs.

CHANGE IN PROPOSAL SUBMITTAL DATE

The Proposal Submittal Date for this Project has been changed from September 8, 2005 to September 15, 2005. The time and place for the Submittal Proposal remains the same.

CHANGES TO PROJECT MANUAL & DRAWINGS

CLARIFICATIONS

Item # 1. All existing devices requiring relocation, per the Construction Documents, (i.e., CCTV cameras, fire alarm devices, security devices, etc.) shall have new, non-spliced cabling installed if the existing cabling is not long enough to extend from the relocated position back to the control monitor or equipment that it is intended to serve.

Item # 2.

Overhead Coiling Fire Doors and Coiling Fire Counter Doors

1. Specification Section 08332 Overhead Coiling Counter Doors, Paragraph 2.5.A.2, Delete requirement for through-wall shaft operator.

00910-1

09-02-2005

ADDENDUM

2. Specification Section 08332 Overhead Coiling Counter Doors, Paragraph 2.3.D, Delete requirement for push/pull handles.
3. Delete requirement for Operation-Cycle Requirements of greater than 20,000 cycles and provide for minimum of 10,000 cycles for overhead door components and operators.
4. Delete requirement for continuous integral wear strips, wind bars and wind-load rating.

Item # 3.

Addendum No. 1 revised Specification Section 09680 Carpet.

Refer to the attachment for performance specifications of the carpet products specified for the Jones Central Library and note the following: Any proposed substitution must be an exact match to the specified carpets in terms of tufting process and density, color match with stain resistant treatment and running line pattern. These are features that were deemed acceptable and approved by the HPL staff and Director and any other proposed "Equal" product must match these characteristics of the specified carpet and carpet tiles.

END OF ADDENDUM NO. Four



William D. Reesby, P.E. Assistant Director

DATE



Design & Construction Division
Building Services Department

END OF DOCUMENT

00910-2

09-02-2005

{b}

bennett
design
group

FACSIMILE TRANSMITTAL SHEET

TO:

Jack Welker

FROM:

Belinda Bennett, ILDA

COMPANY:

Houston Library System

DATE:

September 2, 2005

FAX NUMBER:

713-247-1219

TOTAL NO. OF PAGES INCLUDING COVER:

3

PHONE NUMBER:

SENDER'S REFERENCE NUMBER:

RE:

Jessie Jones Carpet Specifications

YOUR REFERENCE NUMBER:

cc: Albert Wong 7139776086

☒ URGENT

☐ FOR REVIEW

☐ PLEASE COMMENT

☐ PLEASE REPLY

☐ PLEASE RECYCLE

NOTES/COMMENTS:

Dear Jack,

Please find the attached Carpet Specifications for the Jesse H. Jones Central Library Renovation.

PERFORMANCE: Please note that Constantine uses a patented, high density tufting process called "multiply yarn infusion". This was one of the main criteria we thought would allow for the performance we need in the library. Constantine inherently is able to get more tufts per square inch.

TREATMENT: We will also be using Constantine's SPF40 Stain fighting treatment that makes a branded, "Ultron" Nylon 6.6 product perform like a solution dyed product. This allows us to still get the color match we want with stain fighting properties.


ESTHETICS: The patterns are copyrighted by Constantine. We have custom colored their running line patterns. The broad loom product was ran in a 12 foot wide sample so that the entire staff and HLS folks could test it and approve its design. It was a very formal process.

Please do not hesitate to contact me should you have any questions.
Belinda Bennett, ILDA

520 Post oak blvd., suite 880 Houston, tx 77027 P 713.850.8833 F 713.850.0383

email: Belinda.Bennett@bennett-design.com

Constantine = Carpet Tile

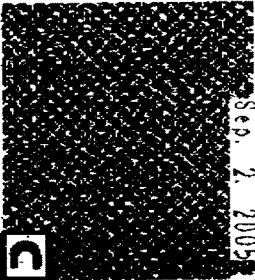

CONSTANTINE

Sketch The Specification

Style

Gesture Pattern Repeat
Sketch Pattern Repeat

Tile Size

Construction

Face Yarn

Yarn Spec

Treatment

Tufted Yarn Weight

Tufts per Square Inch

Pile Height

Primary Backing

Tile Backing

Post Installation Protection

LEED

Adhesive Recommended
Flammability

Warranty

Dye Lot Size

Custom Colors & Wt

Optional Tile Sizes

Broadloom
Origin

*Constantine incorporates a patented, high density tufting process called multiple yarn infusion. Conventional measurements of gauge and stitch rate are inadequate and misleading. Therefore, tufts per square inch are used to provide accurate specifications.

P.O. Box 2399

Atlanta, GA 30322

Phone: 404.277.0826

Fax: 404.277.0822

Web: www.constantine.com

Gesture & Sketch Tile

18" x 18"

1/2" x 9"

18" x 18"

Patterned Loop produced with patented, high density process Multiple Yarn Infusion

100% Ullon Nylon 6.5 with

Permanent Static Control, Commercial Carpet Protector & Stainguard Protection

Twisted and Supertex Heasel

with a Minimum of 5.0 Tufts per Inch

Constantine's SPF 40 - Applied treatment to yarn. Gives product attributes of a solution dyed yarn.

38 oz. 170 (Gauge x Stitch Rate x Tufts/Inch)

0.2

5.5 oz. Multi layered woven and non woven composite for enhanced straightness, turbind and edge reveal

100% Closed Cell Vinyl Composite Backing with Fiberglass Inter-liner for dimensional stability.

Constantine Commercial Carpet Guard #7160R, 23 mm thickness should be specified.

DO NOT USE PLASTIC. Plastic can permanently discolor carpet and cause accelerated soiling.

All products are available with varying percentages of post-industrial recycled fiber for a minimum of 2,500 ey. Recycled content percentages are determined by the total weight of the product and will be affected by the backing selection. We offer backings and post-stain resistant finish with post-industrial and post-consumer recycled content that can increase your total recycled content percentage. All recycled content contributes to the NC and CI LEED rating systems under Materials & Resources, Credit 4.1 Recycled Content, and Credit 4.2 Recycled Content.

Constantine's Carpet Tile Adhesive #320 Passes Class 1 (ASTM E-648) Radiant Panel Critical Radiant Flux > .50 W/cm²

Smoke Density (ASTM E-662) < 450 10 Year Wear

Unlimited Available at Minimum Yardages 24" x 24", 36" x 36", 18" x 36"

351 yd² minimum Available at Minimum Yardages U.S.A.

Constantine's Carpet Tile Adhesive #320 Passes Class 1 (ASTM E-648) Radiant Panel Critical Radiant Flux > .50 W/cm²

Smoke Density (ASTM E-662) < 450 10 Year Wear

Unlimited Available at Minimum Yardages 24" x 24", 36" x 36", 18" x 36"

351 yd² minimum Available at Minimum Yardages U.S.A.

Constantine's Carpet Tile Adhesive #320 Passes Class 1 (ASTM E-648) Radiant Panel Critical Radiant Flux > .50 W/cm²

Smoke Density (ASTM E-662) < 450 10 Year Wear

Unlimited Available at Minimum Yardages 24" x 24", 36" x 36", 18" x 36"

351 yd² minimum Available at Minimum Yardages U.S.A.

Constantine = Broadloom

CONSTANTINE

Crossbar Specification

Style	Crossbar
Pattern Repeat	18" x 18"
Construction	Patterned Loop produced with patented, high density process Multiple Yarn Infusion
Face Yarn	100% Utron Nylon 6.6 with Permanent Static Control & Commercial Carpet Protector
Yarn Spac	Twisted and Superba Heatset
Treatment	with a Minimum of 5.0 Turns per Inch
*Tufts per Square Inch	Constantine's <u>SPF 40</u> . <i>Applied treatment to yarn. Gives product attributes of a solution dyed yarn.</i>
Pile Height	38 oz.
Primary Backing	173 (Gauge x Stitch Rate x Tuft/Stitch)
Secondary Backing	0.2
Width	5.5 oz. Multi layered woven and non woven composite for enhanced straightness, tuftbind and edge ravel.
Post Installation Protection	EPA 1 High Performance Utility
LEED	12'
	Constantine Commercial Carpet Guard
	#71160R, 23 mm thickness should be specified.
	DO NOT USE PLASTIC.
	Plastic can permanently discolor carpet and cause accelerated soiling.
	All products are available with varying percentages of post-industrial recycled fiber for a minimum of 2,500 sq. Recycled content percentages are determined by the total weight of the product and will be affected by the backing selection. We offer backings and SPF 40 stain resistant finish with post-industrial and post-consumer recycled content that can increase the total recycled content percentage. All recycled content contributes to the NC and CI LEED rating systems under Materials & Resources, Credit 4.1 Recycled Content, and Credit 4.2 Recycled Content.
Adhesive Recommended	Constantine's Premium, Standard Tack
Flammability	Adhesive #27 for Patterned Carpet
Warranty	Passes Class 1 (ASTM E-648) Radiant Panel
Dye Lot Size	Critical Radiant Flux > .50 W/cm ²
Custom Colors & Wt.	Smoke Density (ASTM E-662) < .450
Origin	10 Year Wear
	Unlimited
	Available at Minimum Yardages
	U.S.A.

*Constantine incorporates a patented, high density tufting process called multiple yarn infusion. Conventional measurements of gauge and stitch rate are inadequate and misleading. Therefore, tufts per square inch are used to provide accurate specifications.

P.O. Box
2399
Dakota, GA
30722

Int. 706
277.0926
Ext. 706
278.6882

800
308.4344

9/2/2005